Exim control flow

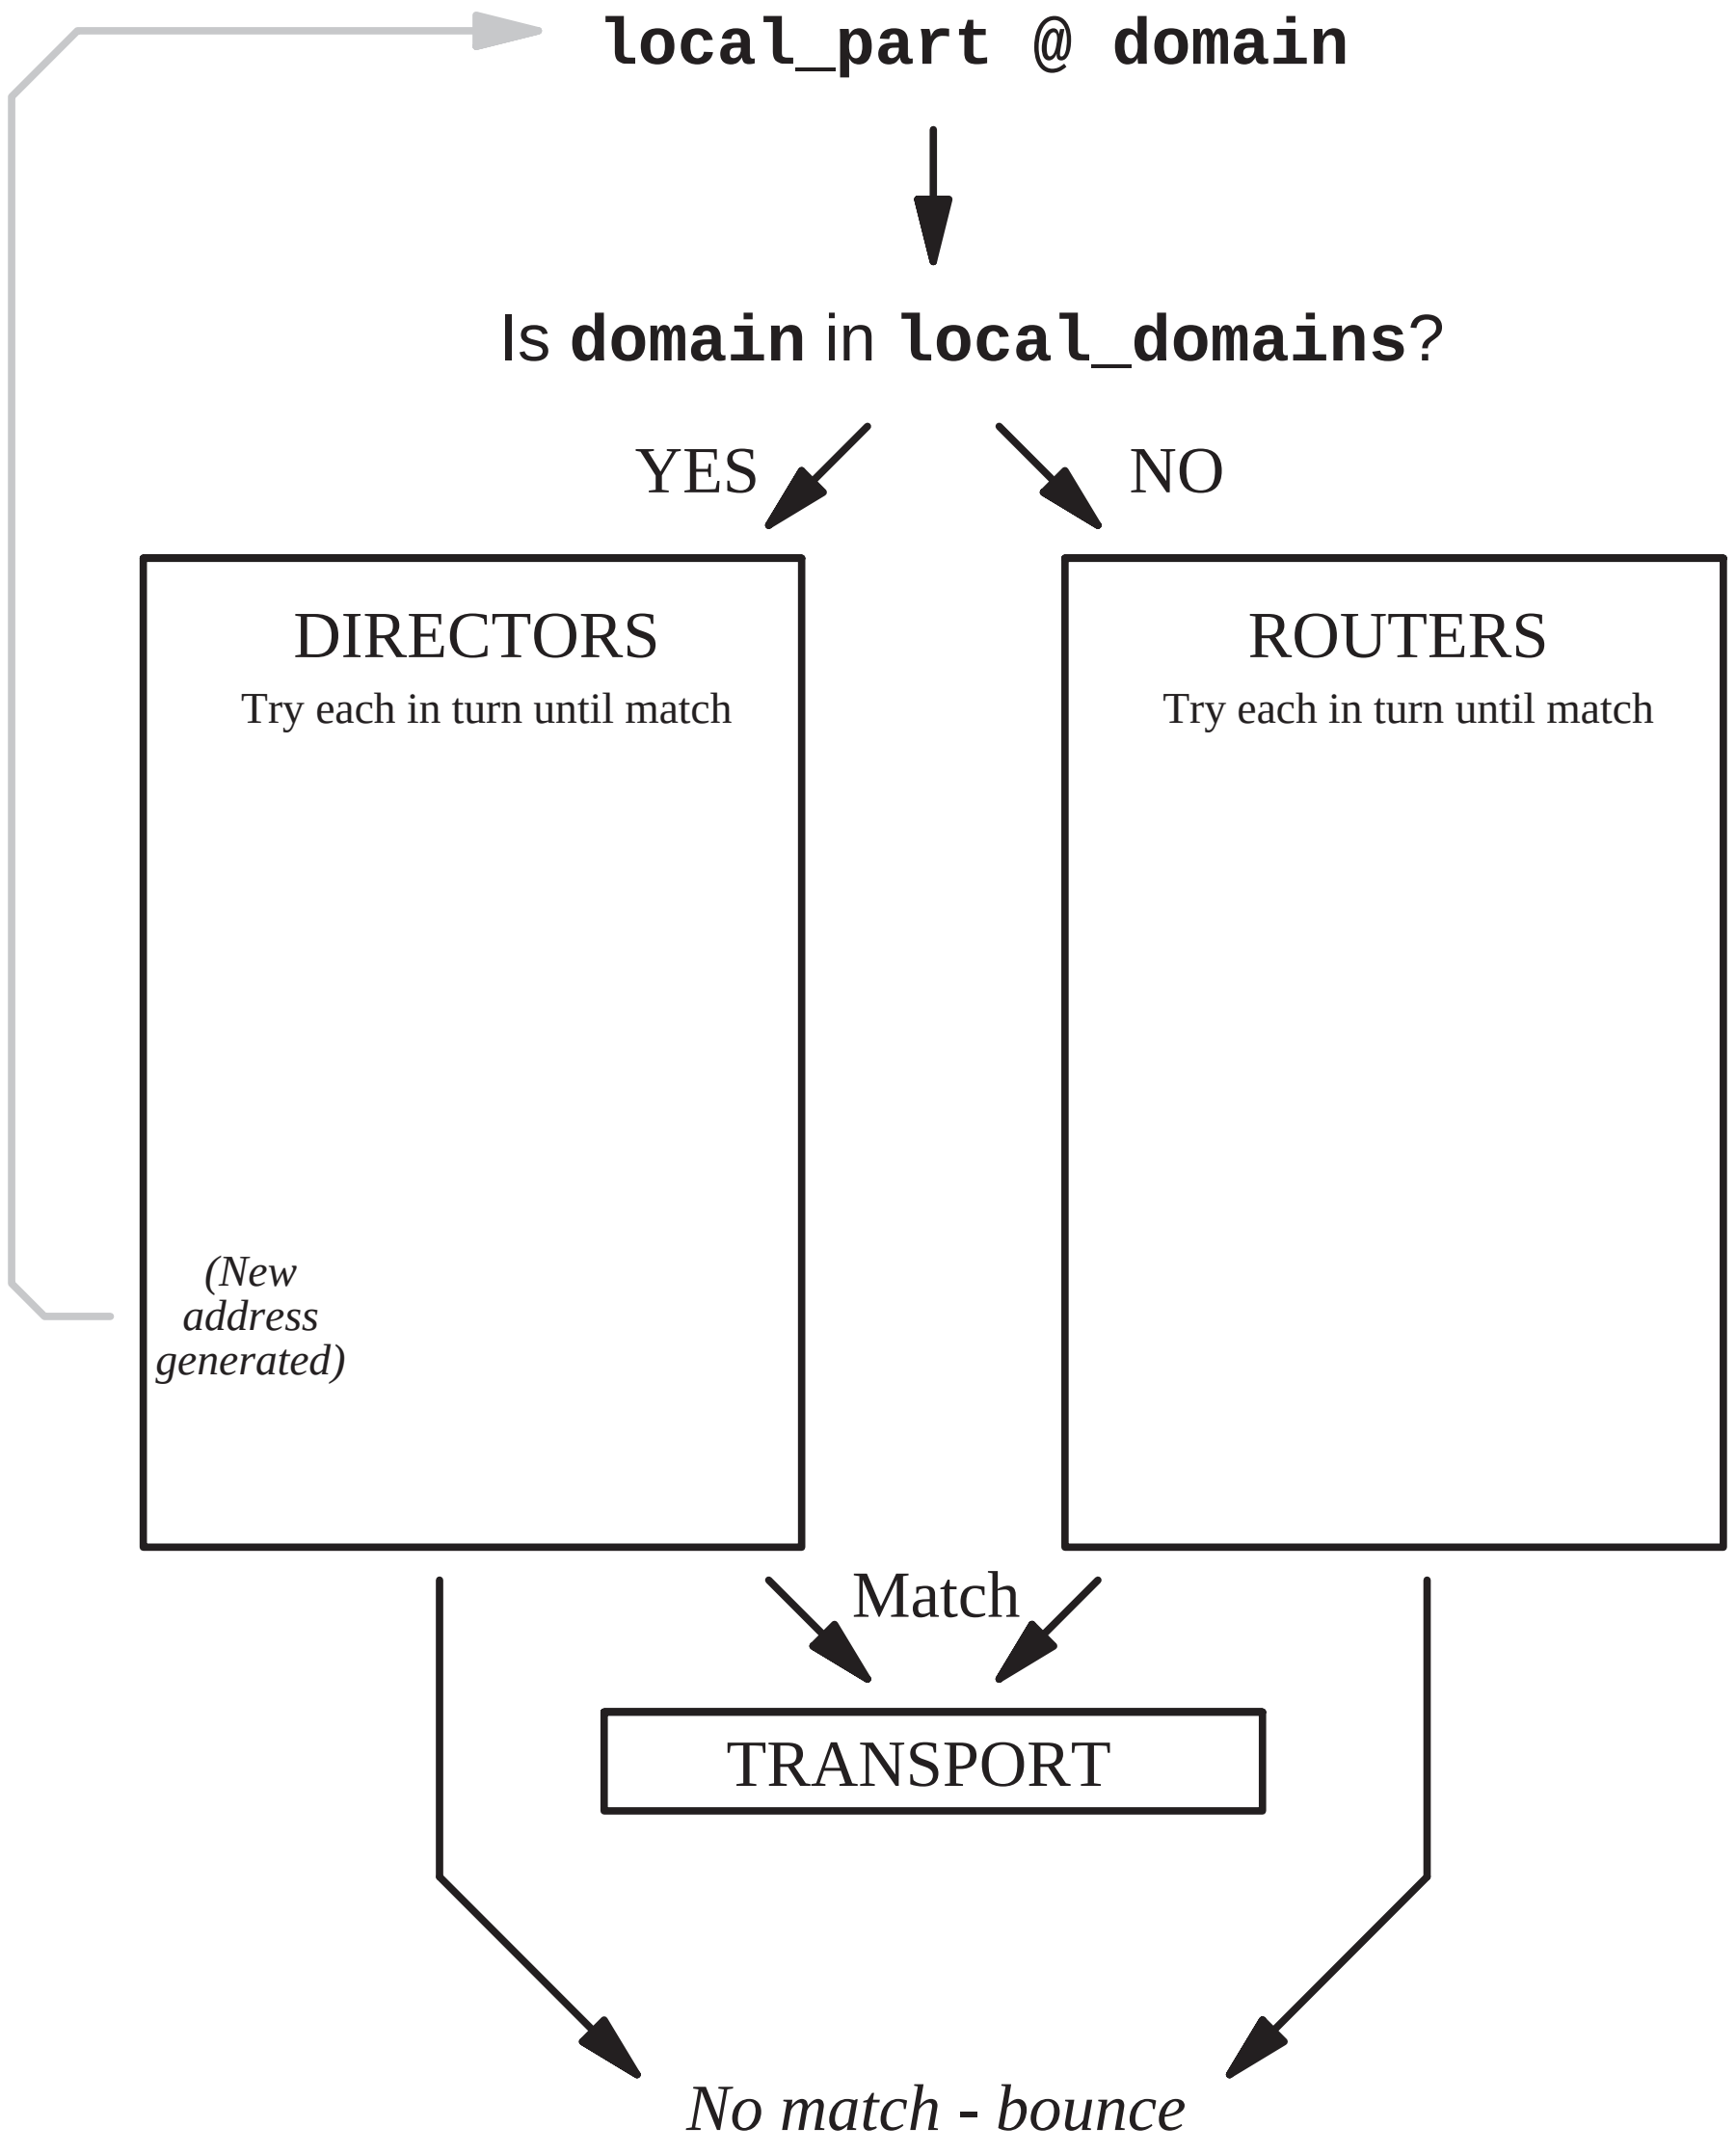


```
system_aliases:
  domains = *.xyz.com
  local_parts = postmaster
  condition = ${some test}

  driver = aliasfile

  file = /etc/aliases
  search_type = lsearch
  user = exim
  file_transport = address_file
  pipe_transport = address_pipe

  no_more
  unseen
```

Director name

Optional Preconditions

Driver (exim function to use)

Driver parameters

Optional Postconditions